




DIN 374



105/3
HSS-E

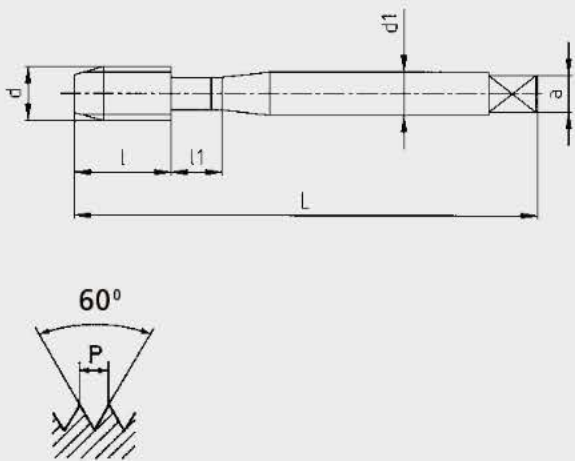

DIN 374

ISO 2(6H)

C/2.5

Norm / Norme / Norm

Toleranzklasse / Classe de tolérance / Class of tolerance



L	l	d1	a	d	P	
90	22	6	4.9	MF 8	1	7
90	20	7	5.5	MF 10	1	9
100	24	7	5.5	MF 10	1.25	9.75
100	22	9	7	MF 12	1	11
100	22	9	7	MF 12	1.25	10.75
100	22	9	7	MF 12	1.5	10.5
100	22	11	9	MF 14	1.5	12.5
100	22	12	9	MF 16	1.5	14.5
110	25	14	11	MF 18	1.5	16.5
125	25	16	12	MF 20	1.5	18.5
125	25	16	12	MF 22	1.5	20.5
140	28	16	12	MF 24	1.5	22.5
140	28	16	12	MF 24	2	22

Art.	Stock
BC866704	●
BC866705	●
BC884484	●
BC866706	○
BC861212	●
BC866707	●
BC866708	●
BC866709	●
BC866710	○
BC866711	●
BC866812	●
BC866814	●
BC866813	●

D

105/3 Grünring

Speziell geeignet für G16 Temperguss, G17 Gusseisen mit Kugelgraphit (Sphäroguss), G18 Gusseisen mit Lamellengraphit (Grauguss), G19 Gusseisen mit Vermikulargraphit, G26 Aluminium-Gusslegierungen Si 0.5% – 5%, G27 Aluminium-Gusslegierungen Si 5% – 10%, G28 Aluminium-Gusslegierungen Si > 10%, G30 Magnesium-Gusslegierungen, G33 Ferro-Tic

F

105/3 Anneau vert

Spécialement conçu pour G16 fonte malléable, G17 fonte à graphite sphéroïdal, G18 fonte à graphite lamellaire (fonte grise), G19 fonte à graphite vermiculaire, G26 alliages de fonte d'aluminium Si 0.5% – 5%, G27 alliages de fonte d'aluminium Si 5% – 10%, G28 alliages de fonte d'aluminium Si > 10%, G30 alliages de fonte de magnésium, G33 ferro-Tic

E

105/3 Green ring

Specific suitable for G16 malleable cast iron, G17 nodular graphite cast iron, G18 lamellar graphite cast iron (grey cast iron), G19 vermicular graphite cast iron, G26 aluminium cast alloy Si 0.5 % – 5%, G27 aluminium cast alloy Si 5% – 10%, G28 aluminium cast alloy Si > 10%, G30 cast alloy of magnesium, G33 ferro-Tic